

Standard 6' Speed Bump


Reflective Stripe Placement

Cat Eye Placement

Bolt Hole


Hardware installation holes are drilled with a 1/2" drill bit.
 Hardware available:
 Asphalt or gravel: 14" x 1/2" rebar spike with 5/8" washer
 Concrete: 4 1/2" lag bolt with 2" lag shield and 1/2" washer

Use 10 ounce of epoxy or construction adhesive (ie. Polyurethane PL Premium) for installations where no hardware is allowed.

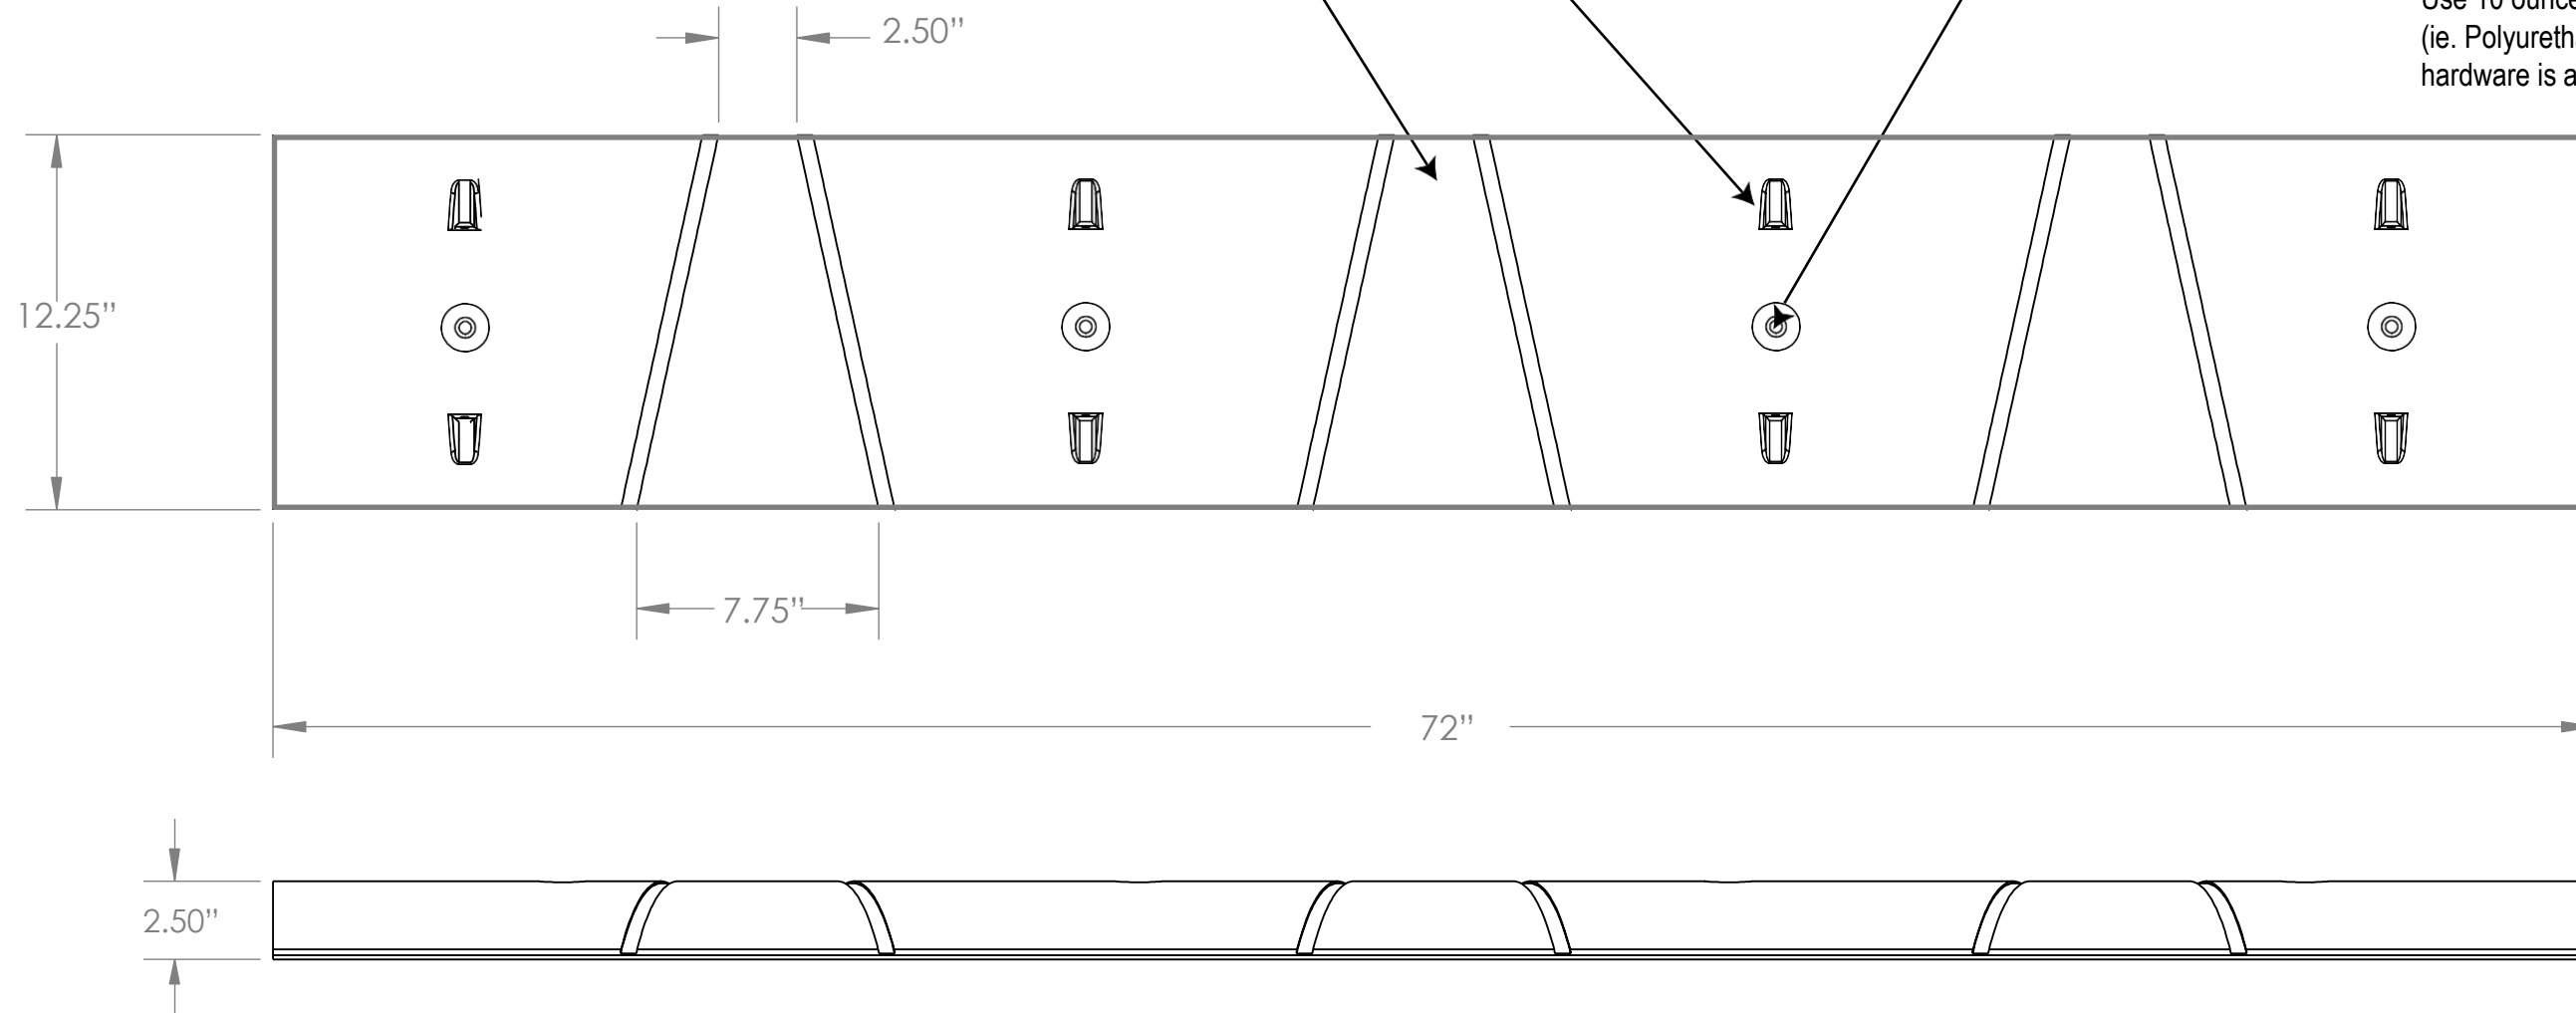


Part # SB72N
Part # SB72N-S

Channels End View

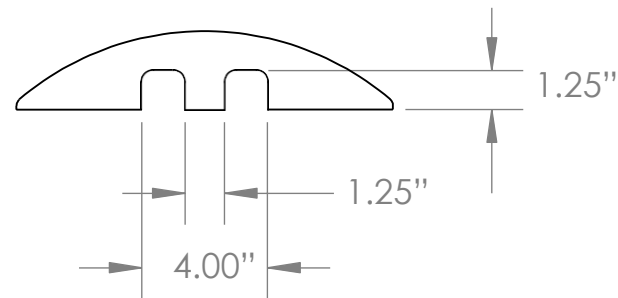

End Cap

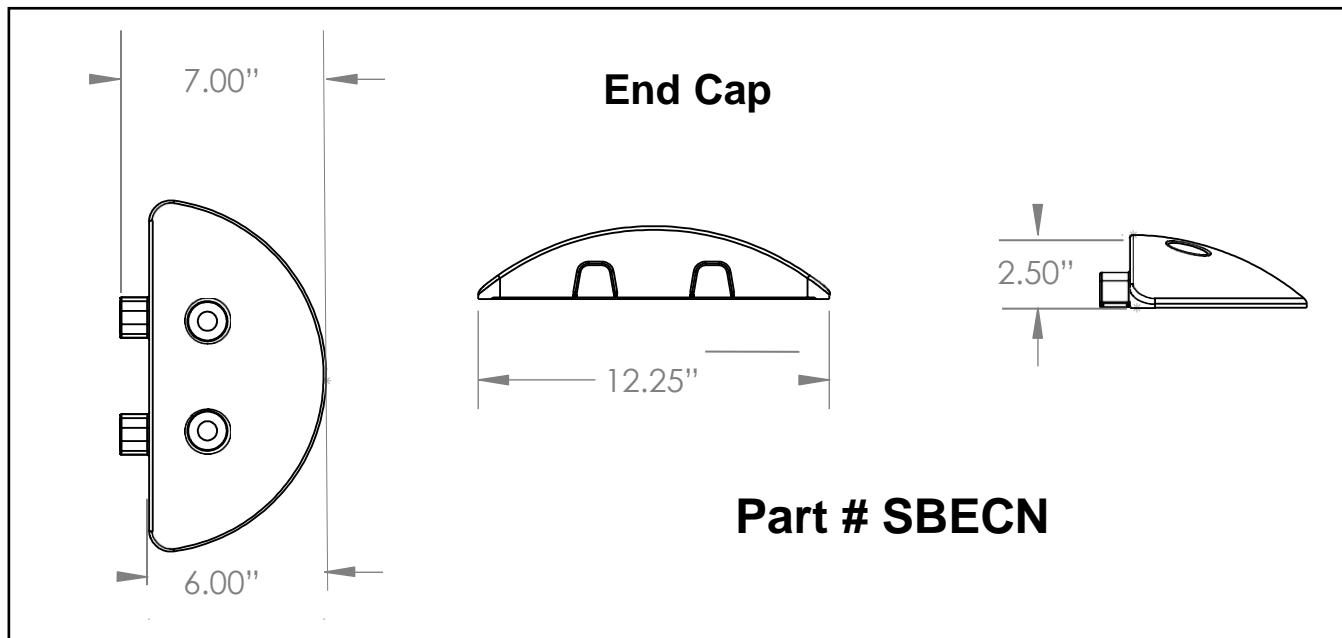

NOTES:

1. WEIGHT: 53 lbs. without end caps. Endcap Weight: 3.5 lbs.
2. DIMENSIONS AND FEATURES ARE REPRESENTATIVE AND NOT GUARANTEED. FOR CRITICAL APPLICATIONS A SAMPLE OF CURRENT PRODUCTION PARTS SHOULD BE EVALUATED.

